



“INNOVATIONS FOR ADVANCED FASHION INDUSTRY PROFESSIONALS”

Intelligent Manufacturing
High Performance with
Less Manpower



SAKGO



专业研发 与生产针织自动化

"Advanced R&D and Automated Machines
for Efficient Knit Production"



COMPANY PROFILE

Ningbo SAKGO Electrical Machinery Technology Co., Ltd. is located in Yinzhou District, Ningbo City, Zhejiang. It is a high-tech enterprise that integrates the research and development, production, sales, and service of automated industrial sewing machines. The talent team, composed of several technicians with nearly 20 years of industry experience, and our production base have created SAKGO's strong production capacity. The company has achieved an independent integrated of parts manufacturing and assembly, and mainly produces machines such as automatic rolling hem and flat hem.

At present, the company has successfully developed three major series and a number of varieties of industrial sewing machines, and all of them have passed the authoritative certifications such as EU CE and ROHS, and are exported to more than thirty countries and regions in Central and South America, Asia, Africa and Europe. The huge international marketing network has made SAKGO Company a flag of China's sewing machine automation field in the world.

SAKGO always takes innovation as its soul, service as its root, quality as its foundation, and strives to create a world-class high-end with national dignity, truly becoming a participant and creator of social development.

Because of our focus, we understand your needs better; because of our high-end, we are closer to your expectations. We hope to become the pioneer leader of the global automatic pendulum machine.

宁波尚高机电科技有限公司位于浙江省宁波市鄞州区，是一家集自动化工业缝纫机的研发，生产，销售，服务于一体的高科技企业。由多名在行业拥有近20年工作经验的专业技术人员组成的人才队伍配合我们的生产基地造就了尚高强大的生产能力。实现了零件制造和装配的自主一体化模式，并主要生产自动卷下摆，平下摆等机器

目前，公司已成功研发出三大系列和数个品种的工业缝纫机，并且全部通过欧盟CE ROHS等权威认证，远销中南美洲，亚洲，非洲，欧洲中的三十多个国家和地区。庞大的国际营销网络，使尚高公司成为中国缝纫机自动化领域在世界的一面旗帜

尚高始终以创新为魂，服务为根，质量为本，倾力打造有民族尊严的世界级高端品牌，真正成为推进社会发展的参与者和缔造者

因为专注我们更懂得您的需求，因为高端我们更贴近您的期望。我们希望成为全球自动下摆机的开创者和领导者

共享 · 先进 · 专业

使命:

通过持续创新和技术升级, 为客户提供优质的针织自动化设备和服务

Mission:

Through continuous innovation and technological upgrading, To provide customers with high quality knitting automation equipment and services

宗旨:

致力于推动针织行业自动化发展 提供高效智能的生产解决方案 为客户创造更大的价值

aim:

Committed to promoting the development of automation in the knitting industry Provide efficient and intelligent production solutions Create greater value for customers

远景:

成为针织自动化领军企业, 引领行业发展打造全球知名的自动化生产解决方案供应商

Distant view:

To become a leader in knitting automation, Leading the development of the industry to build a globally renowned Supplier of automated production solutions

Professional research and development and production of knitting automation

目录

CATALOGUE



Round-neck shirt
圆领衫

T-shirt
T恤衫

Underwear
内裤

Pants
裤子

tag machine
订标签

Pocket
开袋

Provincial administrative region
省位

Labeling
贴标签

Shoulder strap
肩带

Kangaroo Pocket
袋鼠口袋

Side Vent
开叉

Patch Pocket
贴袋

Automatic Tubular-Type Hemming Machine 自动下摆机(成人/中童/儿童)	SK-1128X-P26
Automatic Tubular-Type Hemming Machine for Kids' Styles 儿童自动下摆机	SK-1128K-/P36/WT264
Automatic Flat-Type Bottom and Sleeve Hemming Machine 平台式下摆机	SK-1127-P2664
Neck Binding Machine for T-Shirts SK-1151 上圆领机	SK-1151-X
Automated Crewneck Binding and Attaching System 自动上圆领机	SK-1151-X
Automatic (Tubular) Sleeve Hemming Machine 袖口机	SK-1126-PWT264
Automatic Flat-Type Bottom and Sleeve Hemming Machine 平台式下摆机	SK-1127-P2664
Elastic Band Ring-Making Machine (Single Hand) 单头接橡筋机	SK-1430-J210
Elastic Band Ring-Making Machine (Double Hand) 双头接橡筋机	SK-1730-JAMS
Automatic Waistband Elastic Attaching Machine 自动内裤上橡筋机	BRK-1018-P3664 (1131-w)
Boxer Leg Hemming Machine 裤脚机	SK-1129-PWT264
Automatic Waist Top-Stitching Machine 自动拉腰机	SK-1124
Automatic Elastic Band Attaching Machine (Overlock Stitch) 自动上腰机	SK-1125
SSingle-Head (I-Shaped) Hang Tag Attaching Machine 单头钉标机	SK-9001
Single-Head (Ring-Shaped) Hang Tag Attaching Machine 子母扣套环机	SK-9002
Pneumatic Tag Gun 气动吊牌枪	SK-9003
Four-Head (I-Shaped) Hang Tag Attaching Machine 4头钉标机	SK-9004
Automatic Pocket Welting Machine with Top-Stitch, Bartacking, and Laser Cutting Technology 激光开袋机	SK-1130
Pleating Machine for Chino Pants (Front/Back Body) 省位机	SK-3050
Price Sticker Attaching Machine for Hang Tags 贴标机	SK-1159-P
Automatic Hanger Loop Attaching Machine 肩带机	SK-1169
Kangaroo Pocket Joining Machine 袋鼠机	SK-1168
Automatic Side Vent Machine 自动开叉机	SK-1182-02
Automatic Pocket Setter Machine 自动贴袋机	SK-1161

SK-1128-P2600 Automatic Tubular- Type Hemming Machine

自动下摆机
TYPE: PEGASUS W2664P-35B
SPEC: 356BS
DEVICE: FT0C/UT3J/PT



Automatic Tubular Hem Sewing Machine with Automatic Hemming, width Control, Fabric Edge Trimming, and Single/Multiple Panel Seam Positioning, Featuring an Automatic Folding and Stacking System-A High-Capacity High-Quality Solution for Efficient Production

自动管状缝边机，具备自动缝边、宽度控制、布边修剪、单/多面板缝合定位等功能，还配有自动折叠和堆叠系统——这是高效生产所需的高容量高品质解决方案。

Device comes With Clothing size Adjustment Function (38-88cm sewing range)

设备自带衣服大小码调节功能（38-88公分缝制范围）

Automatic Identification of seam Position, with reverse strand function, starting seam end stitch is completely consistent

自动识别缝位，带倒股功能，起缝结束线迹对接

Deviation Correction by motor Control is more stable

适用于圆领衫或以缝边的全自动折下摆



Head type 机头型号	W2664P-35B	Maximum sewing speed 最大车缝速度	5000RPM
dimension 尺寸	38-88CM	Air pressure/ air consumption 气压/耗气量	>4.5BAR/190L
capacity 产能	180-240pieces per set 每小时180-240件	Needle pitch 针距	Standard: 5.6MM 标配: 5.6MM
Folded edge width 折边宽度	15-30MM		

SK-11□□-□□□□-□□

① ② ③ ④ ⑤

① SK:SAKGO

② 1128 29 31: Machine number 机器编号

③ P:PEGASUS 飞马 Y:Machine number 大和

④ W26/W36:W2600/W3600
wt: WT200/600

⑤ S1/S2: Different options for the
same model
S1/S2:同一型号不同选配

X:Adult version 成人款

K:Children's Edition 儿童款

圆领衫 / T-恤衫

圆领衫 / T-恤衫

SK-1128K-Pwt264 Automatic Tubular-Type Hemming Machine for Kids' Styles

儿童下摆机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

Automated hem folding for children's round-neck shirts or hemmed edges.
适用于儿童圆领衫或以缝边的全自动折下摆

One operator can efficiently manage 2-3 machines, simplifying a traditionally difficult sewing task.
一个人可操作2-3台机器，降低人工缝制难度

Features automatic size adjustment (25-50 cm sewing range) without manual intervention.
自动大小码调节功能，无需人工调整（25-50公分缝制范围）



Head type 机头型号	WT264P-35NB	Maximum sewing speed 最大车缝速度	4000RPM
dimension 尺寸	25-50CM	Needle pitch 针距	Standard: 5.6MM 标配: 5.6MM
capacity 产能	180-240pieces per set 每小时180-240件	Air pressure 气压	>4.5Bar

SK-1128K-P36 Automatic Tubular-Type Hemming Machine for Kids' Styles

中童下摆机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

Automated hem folding for children's round-neck shirts or hemmed edges.
适用于儿童圆领衫或以缝边的全自动折下摆

One operator can efficiently manage 2-3 machines, simplifying a traditionally difficult sewing task.
一个人可操作2-3台机器，降低人工缝制难度

Features automatic size adjustment (30-60 cm sewing range) without manual intervention.
自动大小码调节功能，无需人工调整（30-60公分缝制范围）



Head type 机头型号	W3664P-35B	Maximum sewing speed 最大车缝速度	5000RPM
dimension 尺寸	30-60CM	Needle pitch 针距	Standard: 5.6MM 标配: 5.6MM
capacity 产能	180-240pieces per set 每小时180-240件	Air pressure 气压	>4Bar

SK-1126-Pwt264 Automated Crewneck Binding and Attaching System

自动袖口机
TYPE: WT264P-35NB
SPEC: 356
DEVICE: FT0C/UT327/PT



New technology, easy to use, fully automated operation, perfect sewing
新技术, 操作简便, 全自动运行, 缝纫完美

Ideal for Small Tubular Hemming Operations


非常适合小型管状缝合操作

Differential up and down feed mechanism for perfect stitch sewing

差动上下送布机构实现完美的线迹缝制

Prevent the misalignment of the seam arrangement process

防止摆缝工序的错缝

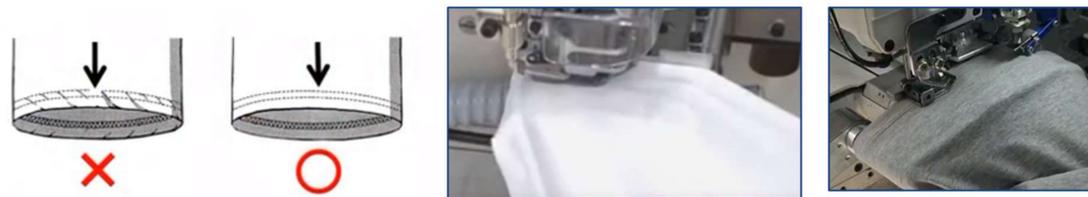

Head type 机头型号	WT264P-35NB	Maximum sewing speed 最大车缝速度	4000RPM
dimension 尺寸	18-40CM	capacity 产能	Each unit has 180 to 240 pieces. 每台180-240个
Needle pitch 针距	Standard: 5.6MM 标配: 5.6MM	Air pressure/ air consumption 气压/耗气量	>4.5BAR/190L

SK-1127-P2664 Automatic Flat-Type Bottom and Sleeve Hemming Machine

平台式下摆机



New technology, easy to use, fully automated operation, perfect sewing
新技术, 操作简便, 全自动运行, 缝纫完美

One operator can efficiently manage 2-3 machines, simplifying a traditionally difficult sewing task.

一个人可操作2-3台机器, 降低人工缝制难度

Belt differential, conveyor belt conveying mechanism

皮带差动, 传送带传送机构

Fully automatic hems suitable for various fabrics or with edge stitching

适用于多种面料或者以边缝的全自动下摆



Head type 机头型号	W2664P-35B	Maximum sewing speed 最大车缝速度	4500RPM
Cuff range 袖口范围	18-30CM	Production capacity 产能	Flat cuffs: 12-15PCS/MIN Flat hem: 8-10PCS/MIN 平袖口12-15PCS/MIN 平下摆8-10PCS/MIN
Sewn range 下摆可缝制范围	18-80CM (folded center distance) 18-80CM (对折中心距)	Air pressure requirement 气压要求	>4Bar
Machine external dimensions 机器外形尺寸	2900*1400*1410		

Round-neck shirt
圆领衫

Round-neck shirt
圆领衫

SK-1151 Neck Binding Machine for T-Shirts 上圆领机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

Automatically determine the bone seam position, reducing the time for manual alignment.

自动骨缝位置，减少人工对位时间

The guide fabric structure prevents tilting when sewing the collar and the body of the garment together.

导布架构，车缝衣领与布身结合时，防止倾斜

Adjustable tension control mechanism, reducing fabric wrinkling phenomenon

可调式张力控制机构，减少布料起皱现象



Maximum sewing speed 最高缝制速度	4500RPM	Backside sewing range 布后车缝范围	(After folding) ±0.2MM (对折后) ±0.2MM
Sewing stitch spacing 缝制针距	0.5-6MM	Use the needle type 使用针型	DCX24#11
Air pressure / Air consumption 气压/耗气量	0.5MPA/35L/MIN	Working voltage 电压耗电	AC200-240V50 60hz/0.66kwh
Working air pressure 产能	Each machine can process 180 to 240 pieces per hour. 每台180-240片/小时	Use fabric 使用布料	Knitted fabric 针织面料

SK-1151-X Automated Crewneck Binding & Attaching System 自动上领机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

Automatic Collar Stay Positioning
领骨自动定位

Automatic Size Adjustment
自动调码

Differential feed (upper and lower) enables automatic material accommodation and fully skill-free operation.

上下差动送料，实现自动容位，完全去技能化

It features automatic edge alignment, enabling fully automated sewing.

自动纠偏，可实现全动车缝



Model 型号	SK-1151-X	Sewing Speed 电机转速	0-4500RPM
Voltage 电压	AC220V	Width of the receipt 领条宽度	16-38MM
Frequency 频率	50HZ	Perimeter 周长	525-905MM
Power 功率	2.0KW	Atmospheric pressure 气压	0.6MPa

SK-1430-J210

Elastic Band Ring-Making Machine (Single Hand)

单头接橡筋机



Fully Automated, Operator-Free System for Effortless Use and Flawless Swing Quality Ever Time.

全自动、无需操作人员的系统，让您轻松使用，每次都能实现完美的摆动效果。

Adopt imported SMC electrical accessories, which run faster and provide better stability and durability.


采用进口SMC电器配件，运行更快，性能更好稳定性和耐久性。

The brand-new patented pulley design offers a larger guiding area and higher precision. Faster, more powerful, more comprehensive.

全新专利滑轮设计，导向面积更大，精度更高；更快，更强大，更全面。

Through the color positioning system, single or multiple logos can be precisely located, effectively improving product quality.

通过色彩定位系统，定位位置单一/多个LOGO可精准定位有效提高产品质量。

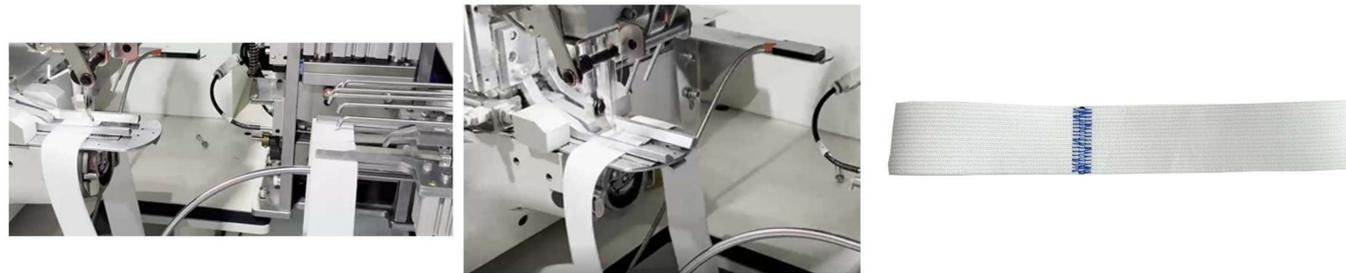

Model of machine 机器型号	SK-1430-J210	Maximum sewing speed 最高缝制速度	2000
Width 宽度	1-5CM	length 长度	20-110CM
Cutting tool 切刀刀具	Dragon Gate Knife 龙门刀	Machine needle (DP*17) 机针 (DP*17)	#11-16
line of sewing 线迹	Human character seam 人字缝		

SK-1730-JAMS

Elastic Band Ring-Making Machine (Double Hand)

双头接橡筋机



Fully Automated, Operator-Free System for Effortless Use and Flawless Swing Quality Ever Time.

全自动、无需操作人员的系统，让您轻松使用，每次都能实现完美的摆动效果。

The machine adopts double head sewing, efficiency doubled

本机采用双头缝制，效率提高一倍

The sewing process is to ultrasonic bond first, then head sew, and the interface is flatter.

缝纫过程是先用超声波粘合，然后头缝，界面比较平。

Adopt imported SMC electrical accessories, fast running speed, and improve better stability and durability.

采用进口SMC电器配件，运行速度快；并提高更好的稳定性和耐用性。



Model of machine head 机头型号	AMS-210EN-1510	Speed 缝制速度	2500
Tension width 松紧宽度	1-8CM	Tension length 松紧长度	20-110CM
Machine needle (DP*17) 机针 (DP*17)	#11-16	Cutting band knife 切带刀具	Ultrasonic 超声波
Visual matching 视觉选配	0/1	Size 尺寸	210*120*160CM

内裤

内裤

BRK-1018-P3664

Automatic Waistband Elastic Attaching Machine

自动裤头机



Stable sewing dimensions can enhance the efficiency of subsequent processes. In the subsequent process, ensure stable and high-quality docking.

稳定的缝纫尺寸可以后道工艺效率。在随后的过程中，确保对接稳定、高质量。

Automatic edge alignment, automatic sewing, automatic waist tightening, and extremely high production efficiency.

自动对边，自动车缝，自动收腰，超高生产效率。

The width of the stop edge within the net bottom line is uniform.

网底线内保的止口宽度均匀。

The nose is centered and features a dual-track design to enhance expandability.

机头居中，双轨设计，增加扩展性。



Head type 机头型号	W3664HP-33A	Maximum sewing speed 最大车缝速度	5000RPM
Sewn range 可缝制范围	35-60CM (center fold distance) 35-60CM (中心对折距)	Needle pitch 针距	Standard configuration: 5.6MM Optional: 4.0/4.8/6.4MM 标配5.6MM 选配4.0/4.8/6.4MM
Air pressure requirement 气压要求	>4Bar	Gas consumption 耗气量	120L/MIN
Production capacity 产能	180-240 pieces per hour for each unit 每台180-240件/小时	Size 尺寸	1300MM*860MM*1550MM

SK-1131-P36-W

Automatic Women's Underwear Elastic Attaching Machine

女士自动内裤上橡筋机



Stable sewing dimensions can enhance the efficiency of subsequent processes. In the subsequent process, ensure stable and high-quality docking.

稳定的缝纫尺寸可以后道工艺效率。在随后的过程中，确保对接稳定、高质量。

Automatic edge alignment, automatic sewing, automatic waist tightening, and extremely high production efficiency.

自动对边，自动车缝，自动收腰，超高生产效率。

The width of the stop edge within the net bottom line is uniform.

网底线内保的止口宽度均匀。

The nose is centered and features a dual-track design to enhance expandability.

机头居中，双轨设计，增加扩展性。



Head type 机头型号	W3664HP-33A	Maximum sewing speed 最大车缝速度	5000RPM
Sewn range 可缝制范围	31-60CM (center fold distance) 31-60CM (中心对折距)	Needle pitch 针距	Standard configuration: 5.6MM Optional: 4.0/4.8/6.4MM 标配5.6MM 选配4.0/4.8/6.4MM
Air pressure requirement 气压要求	>4Bar	Gas consumption 耗气量	120L/MIN
Production capacity 产能	180-240 pieces per hour for each unit 每台180-240件/小时	Size 尺寸	1300MM*860MM*1550MM

Underwear
内裤

Underwear
内裤

SK-1129-Pwt264 Boxer Leg Hemming Machine

自动裤脚机

TYPE: WT264P-35NB
SPEC: 356
DEVICE: FT0C/UT327/PT



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

Small square head type, suitable for sewing small cylindrical clothing
小径小方头式，适合缝制小件圆筒衣料

Differential up and down feed mechanism for perfect stitch sewing

差动上下送布机构实现完美的线迹缝制



Head type 机头型号	WT264P-35NB	Maximum sewing speed 最大车缝速度	3500RPM
Seam coverage 缝制范围	18-40CM	Air pressure /air consumption 气压/耗气量	>4.5BAR/190L
capacity 产能	180-240 pieces per set 每台180-240个	Needle pitch 针距	Standard: 5.6MM 标配: 5.6MM

SK-1124 Automatic Waist Top -Stitching Machine 自动拉腰机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

Operation without skills

无技能操作

Automatic Start/Stop

自动启停

Automatic clothes hanger

自动收衣架

An electrical-controlled multi-thread machine for sewing elastic bands, featuring automatic cutting and automatic material collection devices.

由电气控制多针机，缝制橡筋，带有自动切线，自动收料装置



Head type 机头编号	SK-1124	Clamp bar stacker 夹板堆叠器	Optional accessories 选配
Touchscreen display 触摸屏显示	YES 是	SEWING SIZE 缝纫尺寸	35-70CM
Automatic Thread Trimmer 自动剪线	YES 是	Auto-Foot lifter 自动抬压脚	YES 是
Atmospheric pressure 气压	>0.4Bar		

SK-1125

Automatic Elastic Band Attaching Machine (Overlock Stitch)

自动上腰机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

DC electric motor and microprocessor control

直流电子马达及微处理器控制

ergonomic

符合人体工程学

Minimize fabric waste to the greatest extent

最大限度减少布料浪费

An automatic workstation for sewing shirts with round ribbed bottom using a sewing machine. This machine is equipped with a lockstitch machine with thread cutting function, electronic control, a dual electronic active edge guiding system, and an air-powered automatic material collection device.

一种缝纫带圆罗纹底的衬衫自动工作站。本机采用包缝机带有剪线电子控制、带有双重电子主动边缘导向系统，气动自动收料装置。



Head type 机头编号	SK-1125	Clamp bar stacker 夹板堆叠器	Optional accessories 选配
Touchscreen display 触摸屏显示	YES 是	SEWING SIZE 缝纫尺寸	35-70CM
Automatic Thread Trimmer 自动剪线	YES 是	Auto-Footer lifter 自动抬压脚	YES 是
Atmospheric pressure 气压	>0.4Bar		

SK-9001

Single-Head (I-Shaped) Hang Tag Attaching Machine

单头钉标机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

The operation is simple and convenient without any unnecessary actions


操作简单方便，无需任何不必要的动作

Compact and convenient, it can be placed everywhere

小巧方便，放置简单

Automatic card delivery, quick tag threading, convenient, fast and labor-saving

自动送卡，标签穿线快，方便、快捷、省力

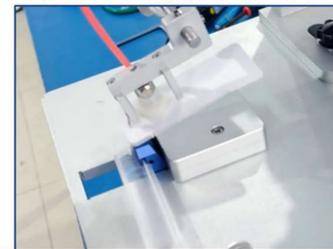

Net Weight 净重	25Kgs	Voltage 电压	220V/50HZ
Air Pressure 空气压力	0.4~0.8 Mpa	Applicable thickness 适用厚度	5~30mm
Needles length 钢针长度	TN3709	Needle Style 钢针类型	Fine/Thin 粗针/细针
Fitness Tag Pin 适用胶针	Nylon Fine 尼龙细胶针/粗胶针	Efficiency 效率	Once every 1 to 2seconds 1-2秒一件

Pants
裤子

tag machine
订标签

SK-9002

Single-Head (Ring-Shaped) Hang Tag Attaching Machine

子母扣套环机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

We have replaced the mechanical valves with electromagnetic valves, eliminating the need for frequent replacements like those of the mechanical valves.

我们采用电磁阀代替机械阀，不需要像机械阀那样频繁更换

We use AirTAC accessories, which are of high quality.

我们使用AirTAC配件，质量可靠。

This machine offers three different speeds, allowing for the selection of the appropriate speed for products of different thicknesses, ensuring better processing for each product.

本机有三种转速供不同厚度的产品选择使产品都能得到更好的加工。




Net Weight 净重	25KG	Voltage 工作电压	100-380V/50HZ
Air Pressure 实用气压	0.4~0.8 Mpa	Applicable thickness 适用厚度	Below 25mm 25毫米以内
Needles length 钢针长度	TN4709	Needle Style 钢针类型	47mm Looping Needle
Fitness Tag Pin 适用胶针	Loop pin 5" 7" inches	Efficiency 效率	The machine operates approximately once every 1-2 seconds. 机器大约1-2秒一次

SK-9003

Pneumatic Tag Gun

气动快钉吊牌打标枪

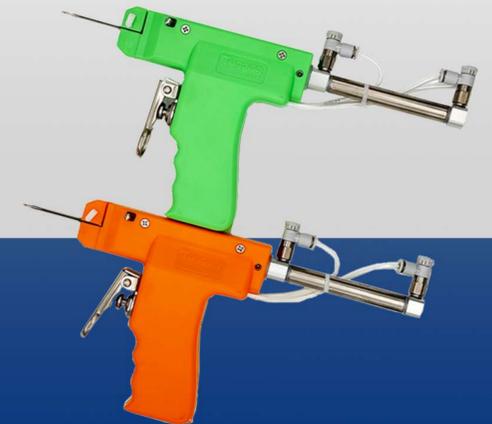

New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

The core components are made of high-quality materials and have a stable and durable structural design.

核心部件采用优质材料制造，结构设计稳定耐用

This pneumatic tag gun not only requires less effort to operate, but also has a longer service life.

这款气动吊牌枪不仅操作更加省力，而且使用寿命更长

This product is widely applicable to various industries and fields, including but not limited to marking on items such as socks, gloves, and clothes.

该产品广泛适用于多种行业领域包括但不限于袜子手套衣服等产品的打标



Net weight 净重	0.22KG	Working voltage 工作电压	100-380V/50HZ
Practical pressure 实用气压	0.4-0.8mpa	Applicable thickness 适用厚度	Below 70mm 70毫米以内
Length of the steel needle 钢针长度	Fine needle 细针 TN3109/TN3709/TN4409/TN5209/TN6509/TN8009 Thin needles 粗针 TN3711/TN4211/TN4611/TN5211	Applicable glue needle 适用胶针	Ny1on Fine 尼龙细胶针\粗胶针
Steel needle type 钢针类型	Fine needle/Thin needles 粗针/细针		

SK-9004

Four-Head (I-Shaped) Hang Tag Attaching Machine

四头钉标机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

Multiple machine heads are placed with different labels
多个机头放置不同的标签

Compact and convenient, it can be placed everywhere
小巧方便，调整简单

Automatic card delivery, quick tag threading, convenient, fast and labor-saving
自动送卡，标签穿线快，方便、快捷、省力



Net Weight 净重	45Kgs	Voltage 电压	220V/50HZ
Air Pressure 空气压力	0.4~0.8 Mpa	Applicable thickness 适用厚度	5~30mm
Needles length 钢针长度	TN3709	Needle Style 钢针类型	Fine/Thin 粗针/细针
Fitness Tag Pin 适用胶针	Nylon Fine 尼龙细胶针/粗胶针	Efficiency 效率	Once every 3 to 4 seconds 3-4秒一件

SK-1130

Automatic Pocket Welting Machine with Top-Stitch, Bartacking, and Laser Cutting Technology

激光开袋机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

Automatic air blowing waste cleaning device to ensure safe operation
自动吹风清洗装置，确保操作安全

Configure high-speed modules to keep the machine stable and fast running.
配置高速模块，保持机器稳定、快速运转。



Maximum sewing range 最大缝制范围	Compressed air 压缩空	he maximum sewing range at the factory 出厂配置最大缝制范围	200 * 30mm
Maximum seam speed 最高缝制速度	3000RPM	Speed setting 速度设定	2000-3000RPM
Maximum number of needles 最大针数	8000 stitches/pattern	Stitch length 线迹长度	0.1-12.7mm
Pattern storage 花样储存	Internal storage, U disk storage 内部存储, U盘存储	Power source 电源	AC 220V

订标机 tag machine

口袋 Pocket

SK-3050 Pleating Machine for Chino Pants (Front/Back Body)

省位机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

The operation method is extremely simple and does not require any special skills from the operator

极简单的操作方式，对操作者无需特别的技能要求

The precise folding method ensures high consistency at every position

精确的折料方式，确保每一个省位的一致性高

The lock-type stitch can adapt to various fabrics, has strong versatility, does not form knots and is not prone to loose threads. The stitching is beautiful and has excellent softness.

锁式线迹可适应多种面料，通用性强，不起梗、不易散线，线迹美观柔软性佳。



Model of machine 机器型号	SK-3050	Sewing length 缝纫长度	60-150MM
Fold the cloth 折布方式	Uniform speed, assisted inhalation 匀速，助力吸入	Sewing speed 缝纫速度	2700~3000RPM
Reinforcement method 加固方式	Sealing or inverted seam reinforcement can be selected. 可选择密封或倒缝加固	Fold angle 折缝角度	2.6~12.6 degrees continuously adjustable 2.6-12.6连续可调
Front dart crease width 前省折缝宽度	Maximum 20mm does not support wide and narrow cycles 最大20MM 不支持宽窄循环	Machine size 机器尺寸	1110*800*1120MM

SK-1159-P Price Sticker Attaching Machine for Hang Tags

自动贴标签机



SK - 1159 is designed for packing department and can save a lot of labour in pasting labels on hangtags.

SK - 1159专为包装部门设计，可以节省大量在吊牌上贴标签的人工。

Suitable for all kinds of industry that require manual pasting of labels

适用于各种需要手工粘贴标签的行业

± 1mm accuracy, 30 - 40 labels/min for good quality and output.

± 1mm精度，30 - 40个标签/分钟，质量好，产量高。

Adapts to various label and hangtag sizes.

适应各种尺寸的标签和吊牌。



Length 长度	2000MM	Width 宽度	1600MM
Height 高度	1600MM	Container inner area 内部容积	2200*200MM
Voltage 电压	220V	Compressed air 空压	0.6MPa

SK-1169

Automatic Hanger Loop Attaching Machine

肩带机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

Automated device, remove cumbersome process skill requirements

自动化装置，去除繁琐工序技能要求

The length of the clothesline can be automatically adjusted, accurate and reliable.

凉衣带长度可自动调节，准确可靠

Ultrasonic cutting of belts, with a neat and clean belt mouth

超声波切带，带口美观整洁



Head type 机头型号	JUKI-LK1900BSS	Maximum sewing speed 最大车缝速度	3200sti/min
half-fold center distance 折后长度	50-400mm	Ultrasonic 超声波	220V/1200W/20KHz
Rated voltage 额定电压	220V	working air pressure 工作气压	0.5MPa

肩带
Shoulder strap

SK-1168

Kangaroo Pocket Joining Machine

袋鼠机



New technology, easy to use, fully automated operation, perfect sewing

新技术，操作简便，全自动运行，缝纫完美

Adjustable mold, the height and width of the kangaroo pocket, the same set of molds can be easily adjusted without replacement

电子眼捕捉车缝位置，不会因为裁片的大小而多缝一针或者少缝一针

Suitable for sewing pockets of sweatshirts, aprons, and can also be equipped with ordinary standard pockets.

适合车缝卫衣口袋，围裙口袋，同时可以选配普通标准口袋的贴袋工艺装置

Sewing range 500mm*280mm, sewing precision, high speed, stable and easy to adjust

车缝范围500mm*280mm，车缝精准，高速，稳定并且容易调整



Production capacity 产能	120-240PCS	Maximum speed 最大转速	3000RPM
Maximum sewing range 最大缝纫范围	500*280MM	working voltage 工作电压	220V
Minimum sewing range 最小缝纫范围	45*45mm	Consumption of gas 耗气量	230L/min
Stitch pitch 缝距	0.1-12.7mm		

袋鼠口袋
Kangaroo Pocket

SK-1182-02 Automatic Side Vent Machine 自动开叉机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

Automatic piece-counting function

自动计件功能

Automatic thread-broken alarm function

自动断线报警功能

Bobbin thread running out alarm function

线轴线材耗尽报警功能

Electronic pressure foot function

电子压力脚功能

All functions of the pattern-sewing Machine(Optional)

缝纫图案机的所有功能（可选）



Model 型号	SK-1182-02	Machine Head 机头	DDL-8000A(JUKI)
Rated power 额定功率	1100W	Rated Vol 额定电压	220V Single phase 50Hz (Earth wire is needed) 220 伏 单相 50 赫兹 (需配备地线)
Air Pressure 气压	0.5Mpa	Needle 针头	DPX17 (8#,9#,11#,12#,14#)
Pitch 针距	0.5mm-6mm	Presser foot lit height 压脚升起高度	0-13MM

Piercing
开叉

SK-1161 Automatic Pocket Setter Machine 自动贴袋机



New technology, easy to use, fully automated operation, perfect sewing
新技术，操作简便，全自动运行，缝纫完美

It has an extremely excellent control ability over special soft, elastic and smooth fabrics.

它对特殊柔软、有弹性和光滑的面料有着极高的控制能力。

The entire machine features computer control and a servo-pneumatic drive system, offering a powerful and user-friendly operation with high stability.

整机电脑程控，伺服+气压驱动，强作便捷，稳定性强。



Model 型号	SK-1161	Machine Head 机头	DDL-8000A(JUKI)
Production efficiency 产能效率	200 - 280 pcs hour	Maximum sewing range 最大缝纫范围	280*280MM
Min imum Sewing Range 最小缝纫范围	40*40MM	Maximum Speed 最大转速	3000RPM
Stitch pitch 缝距	0.1-12.7mm	Air Consumption 耗气量	230L/MIN

Patch Pocket
贴袋



NINGBO SAKGO MACHINERY ELECTRONIC TECHNOLOGY Co., Ltd.

宁波尚高机电科技有限公司

601, 32#block union east U Yingong intelligent industrial park

Yinzhou district ningbo city Zhejiang province china

地址：宁波鄞州联东U谷鄞工智能制造产业园32#601

Website: info@sakgomachinery.com/oscar@sakgomachinery.com

邮箱 info@sakgomachinery.com/oscar@sakgomachinery.com



WhatsApp



WeChat
